

GLAND PLATE
10 x 33 [254 x 838]
OPENING

BOTTOM VIEW


THIS DRAWING IS PROPERTY OF LOAD BANKS DIRECT AND SHALL REMAIN SO WHILE IN USER'S POSSESSION. THE TECHNOLOGY SHOWN HERE IS STRICTLY PROPRIETARY AND IS NOT TO BE DISCLOSED TO ANY 3RD PARTY WITHOUT LOAD BANKS DIRECT PRIOR CONSENT.

REV 2: REV TERMINAL COMPARTMENT DIMS.
REV 1: DWG NO & RATING WAS LS400-800.


GENERAL NOTES:

- A. UNLESS OTHERWISE NOTED:
1. ALL DIMENSIONS ARE IN INCHES.
EXCEPT "xxxx" = mm.
- B. APPROX WEIGHT: 1100 - 1400 LBS [499-635 KG]
- C. SEE ELECTRICAL SCHEMATIC FOR LOAD CAPACITY (KW) RATINGS, VOLTAGE RATINGS, AND BLOWER MOTOR RATING (H.P.)

**OPERATOR REMOTE CONTROL UNIT
FOR DUAL VOLTAGE LOAD BANKS**

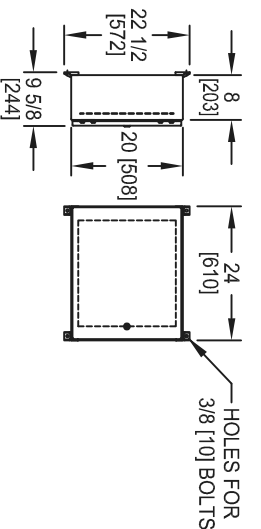

**OPERATOR REMOTE CONTROL UNIT
FOR SINGLE VOLTAGE LOAD BANKS**

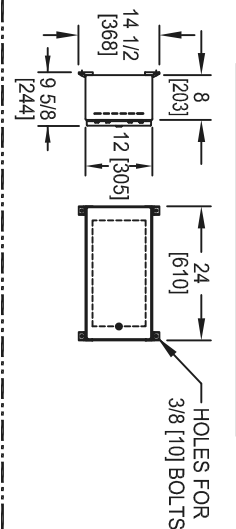

**RECOMMENDED MINIMUM CLEARANCES
(SEE O & M MANUAL FOR INSTALLATION DETAILS)**

- NOTE 1) 36" [914] ALL 4 SIDES FOR MAINTENANCE.
- NOTE 2) 36" - 48" [914-1219] ALL 4 SIDES FOR AIR INTAKE.
- NOTE 3) 12-14 FT [3658-4267] FOR TOP HOT AIR EXHAUST.
- NOTE 4) LOAD BANK IS SUPPLIED WITH OUTDOOR WEATHERPROOF NEMA-3R-TYPE ENCLOSURE.

LB Load Banks Direct
www.LoadBanksDirect.com

LOAD BANK, 250 THRU 800KW

TEXT	DWG. NO.	REV.	SHEET
LS250-800-OL	2	1 of 1	
DRAWN BY	CHECKD BY	DATE	SIZE
JJF	MMP	2/7/13	A