




**REAR VIEW**  
(SEE NOTE 1)

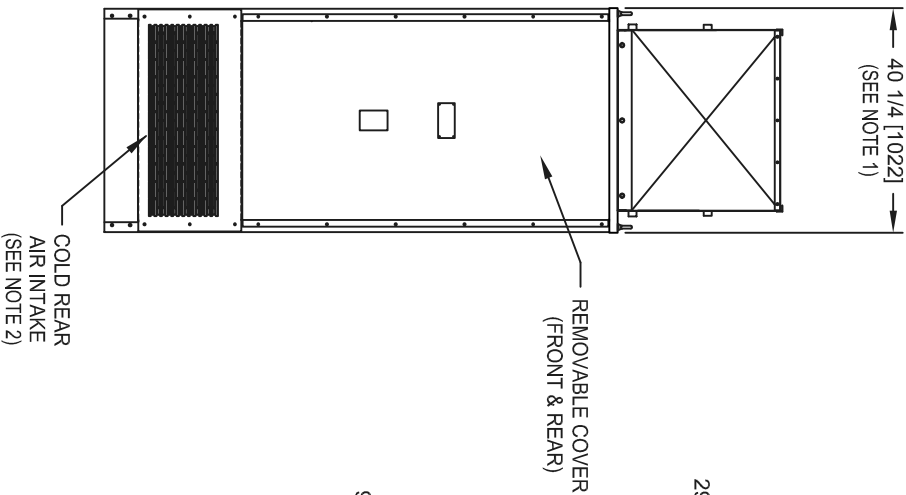


**SIDE VIEW**  
(SEE NOTE 1)

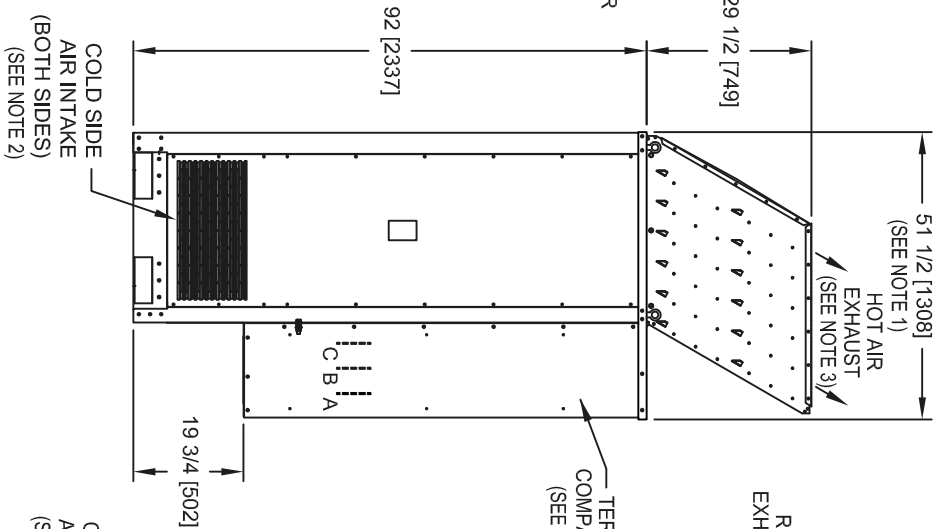

**FRONT VIEW**

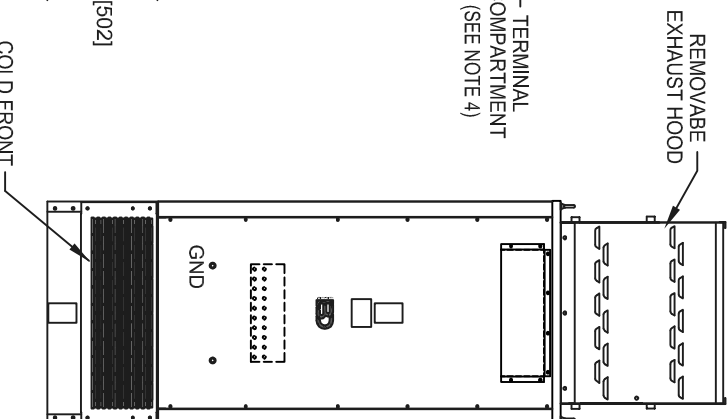

**BOTTOM VIEW**

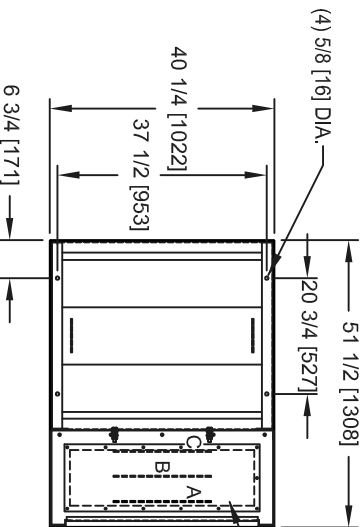


GLAND PLATE  
10 x 33 [254 x 838]  
OPENING


**GENERAL NOTES:**

- A. UNLESS OTHERWISE NOTED:  
1. ALL DIMENSIONS ARE IN INCHES.  
EXCEPT "xxxx" = mm.
- B. APPROX WEIGHT: 1600 - 1900 LBS [726-862 KG]
- C. SEE ELECTRICAL SCHEMATIC FOR LOAD CAPACITY (KW) RATINGS, VOLTAGE RATINGS, AND BLOWER MOTOR RATING (H.P.)

**OPERATOR REMOTE CONTROL UNIT  
FOR DUAL VOLTAGE LOAD BANKS**

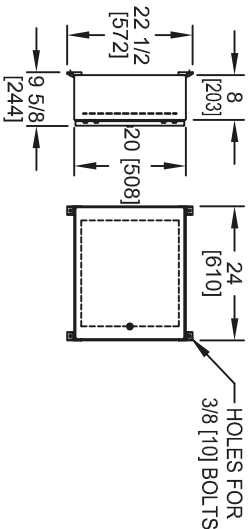

**OPERATOR REMOTE CONTROL UNIT  
FOR SINGLE VOLTAGE LOAD BANKS**

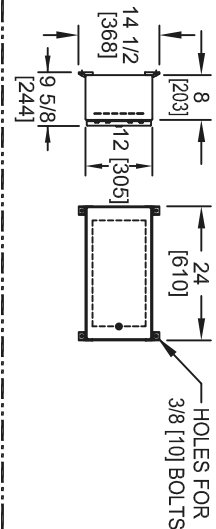

**RECOMMENDED MINIMUM CLEARANCES  
(SEE O & M MANUAL FOR INSTALLATION DETAILS)**

- NOTE 1) 36" [914] ALL 4 SIDES FOR MAINTENANCE.
- NOTE 2) 36" - 48" [914-1219] ALL 4 SIDES FOR AIR INTAKE.
- NOTE 3) 12-14 FT [3658-4267] FOR TOP HOT AIR EXHAUST.
- NOTE 4) LOAD BANK IS SUPPLIED WITH OUTDOOR WEATHERPROOF NEMA-3R-TYPE ENCLOSURE.



LOAD BANK, 800 THRU 1250KW

TEXT	DWG. NO.	REV.	SHEET
LS800-1250-OL		-	1 of 1
DRAWN BY: JUF	CHECKD BY: MMP	DATE: 3/26/13	SIZE: A

THIS DRAWING IS PROPERTY OF LOAD BANKS DIRECT AND SHALL REMAIN SO WHILE IN USER'S POSSESSION. THE TECHNOLOGY SHOWN HERE IS STRICTLY PROPRIETARY AND IS NOT TO BE DISCLOSED TO ANY 3RD PARTY WITHOUT LOAD BANKS DIRECT PRIOR CONSENT.