


NOTE: FOR PERMANENT FLOOR MOUNTING,
REMOVE CASTERS AND MOUNT TO
FLOOR VIA HOLES SHOWN.

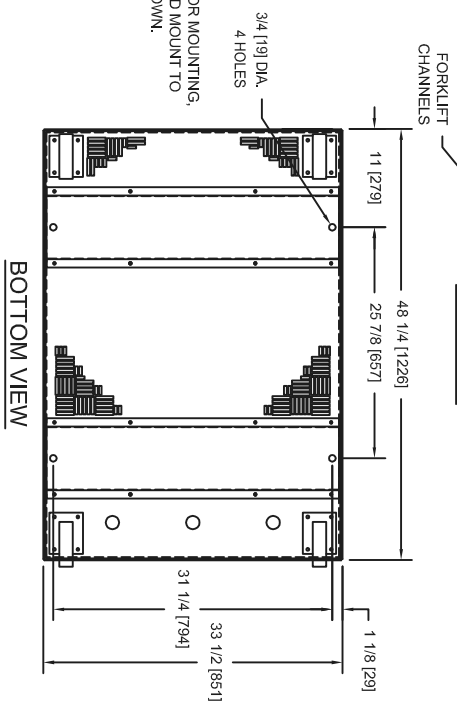

THIS DRAWING IS PROPERTY OF LOAD BANKS DIRECT AND SHALL REMAIN SO WHILE IN USER'S POSSESSION. THE TECHNOLOGY SHOWN HERE IS STRICTLY PROPRIETARY AND IS NOT TO BE DISCLOSED TO ANY 3RD PARTY WITHOUT LOAD BANKS DIRECT PRIOR CONSENT.

GENERAL NOTES:

A. UNLESS OTHERWISE NOTED:

1. ALL DIMENSIONS ARE IN INCHES.
EXCEPT "xxx" = mm.

B. APPROX WEIGHT: 1000 - 1300 LBS [454-590 KG]

C. SEE ELECTRICAL SCHEMATIC FOR LOAD CAPACITY (KW) RATINGS, VOLTAGE RATINGS, AND BLOWER MOTOR RATING (H.P.)



Load Banks Direct
www.LoadBanksDirect.com

TEXT	LOAD BANK, 800 THRU 1000KW	
DWG. NO.	LP800-1000-OL	REV. -
DRAWN BY	JJF	CHECKD BY
	MMP	DATE
		6/19/13
		SHEET
		1 of 2
		SIZE
		A

Part Number	Power Rating - KW	Voltage - VAC	Phase	Frequency - Hertz	Amps
LP800-480-10	800	480	3	60	962
LP800-600-10	800	600	3	60	770
LP1000-480-10	1000	480	3	60	1202
LP1000-600-10	1000	600	3	60	962

Control Circuit Rating: 120 Volts AC 1-Phase 60 Hertz 10 Amps

Fuse Location	Designator	Fuse Class	Volts	Amps
Control Circuit	F100-103	CC	600	6, 8, 10
Blower Circuit	F110-112	J	600	15, 20
Instrumentation	F107-F109	CC	600	1
Load Circuit		CC	600	10, 15, 20, 25, 30
Load Circuit		T	600	70, 80, 100, 125, 150, 200

Customer Load Connections

Use Cam-Lok Power Connectors only for customer Load Connection. Do Not install conduit or knock outs.

All Load Wiring to be minimum 75 degree C rated, Copper Wire only.


Caution - Risk of Electrical Shock. Disconnect ALL Sources of Power before Servicing.

Warning - When mounting on or over a combustible surface, a floor plate of at least 1.43 mm galvanized or 1.6 mm uncoated steel extended at least 150 mm beyond the equipment on all sides must be installed.

THIS DRAWING IS PROPERTY OF LOAD BANKS DIRECT AND SHALL REMAIN SO WHILE IN USER'S POSSESSION. THE TECHNOLOGY SHOWN HERE IS STRICTLY PROPRIETARY AND IS NOT TO BE DISCLOSED TO ANY 3RD PARTY WITHOUT LOAD BANKS DIRECT PRIOR CONSENT.

GENERAL NOTES:

- A. UNLESS OTHERWISE NOTED: EXCEPT "xxxX" = mm.
- B. APPROX WEIGHT: 1000 - 1300 LBS (454-590 KG).
- C. SEE ELECTRICAL SCHEMATIC FOR LOAD CAPACITY (KW) RATINGS, VOLTAGE RATINGS, AND BLOWER MOTOR RATING (H.P.)

 Load Banks Direct www.LoadBanksDirect.com	
TEXT DWG. NO. LP800-1000-0L	REV. - SHEET 2 of 2
DRAWN BY JJF	CHECKD BY MMP
DATE 6/19/13	SIZE A